


**NOTES:**

- ① REMOVE EXISTING POST AND SIGN AND PLACE R8-3a "NO PARKING" SYMBOL SIGN (24"x24") ON NEW POST. MOUNT 2.5-FT. BEHIND CURB AND 7-FT. FROM GROUND TO SIGN BOTTOM. MOUNT SIGN BY DRILLING CORE HOLE THROUGH EXISTING SIDEWALK AND NEATLY GROUTING AROUND TELESPAR ANCHOR AFTER INSTALLATION (TYP.).
- ② BOLLARD SHALL BE FLEXBOLLARD, 7" X 52", YELLOW WITH RED REFLECTIVE STRIPS. AN EQUAL WILL BE ALLOWED AS APPROVED BY THE ENGINEER. MOUNT WITH FOUR ANCHOR BOLTS PER MANUFACTURERS RECOMMENDATIONS ON MEDIAN SURFACE AT LEAST 4" BEHIND THE TOP OF CURB (TYP.).
- ③ RELOCATE SNORKEL USPS MAILBOXES FACING WEST. MOUNT USING 0.5" DIA. STAINLESS STEEL "L" ANCHOR BOLT 2"x8". LOCATIONS SHALL BE APPROVED BY THE ENGINEER PRIOR TO MOUNTING.
- ④ PLACE R8-3a "NO PARKING" SYMBOL SIGN (24"x24") ON NEW POST. MOUNT 2.5-FT. BEHIND CURB AND 7-FT. FROM GROUND TO SIGN BOTTOM. MOUNT SIGN BY DRILLING CORE HOLE THROUGH EXISTING SIDEWALK AND NEATLY GROUTING AROUND TELESPAR ANCHOR AFTER INSTALLATION (TYP.).
- ⑤ REMOVE EXISTING CONCRETE STREET BETWEEN LONGITUDINAL JOINTS AND CONSTRUCT CONCRETE PATCH PER DETAIL 1 ON THIS PAGE. MEDIAN LOCATION AND SAWING OF MATCHING "C" JOINTS SHALL BE FIELD LOCATED. NO CROWNING OF MEDIAN SURFACE WILL BE REQUIRED.
- ⑥ PLACE OM3R OBJECT MARKER SIGN (12"x36") ON NEW POST. MOUNT 1-FT. BEHIND CURB AND 4-FT. FROM GROUND TO SIGN BOTTOM. POST SHALL BE 1.75" SQUARE POST WITH 2" SQUARE ANCHOR. USE 14 GAUGE GALVANIZED STEEL BREAKAWAY TELESPAR OR APPROVED EQUAL. MOUNT ANCHOR 2.5-FT. BELOW MEDIAN SURFACE INSIDE A 3" GALVANIZED STEEL PIPE DRILLED AND GROUTED IN PLACE. ANCHOR SHALL BE SECURED INSIDE 3" PIPE USING COMPACTED SAND. CONSTRUCT 3' STEEL PIPE PRIOR TO POURING THE MEDIAN. USE 0.5" FOAM EXPANSION JOINT BETWEEN PIPE AND MEDIAN CONCRETE (TYP.).
- ⑦ APPLY WHITE PAINT FROM BACK OF CURB TO GUTTERLINE AROUND ENTIRE MEDIAN PERIMETER. USE APPROVED DURABLE EPOXY PAINT PER IOWA DOT IM 483.04.
- ⑧ PLACE R5-1 "DO NOT ENTER" SIGN (30"x30") ON NEW POST. MOUNT 1-FT. BEHIND CURB AND 4-FT. FROM GROUND TO SIGN BOTTOM. POST SHALL BE 1.75" SQUARE POST WITH 2" SQUARE ANCHOR. USE 14 GAUGE GALVANIZED STEEL BREAKAWAY TELESPAR OR APPROVED EQUAL. MOUNT ANCHOR 2.5-FT. BELOW MEDIAN SURFACE INSIDE A 3" GALVANIZED STEEL PIPE DRILLED AND GROUTED IN PLACE. ANCHOR SHALL BE SECURED INSIDE 3" PIPE USING COMPACTED SAND. CONSTRUCT 3' STEEL PIPE PRIOR TO POURING THE MEDIAN. USE 0.5" FOAM EXPANSION JOINT BETWEEN PIPE AND MEDIAN CONCRETE (TYP.).
- ⑨ PLACE 8" WIDE WHITE PAINTED TAPER WITH CHEVRON LINES AS SHOWN. USE APPROVED DURABLE EPOXY PAINT PER IOWA DOT IM 483.04. GROOVE CONCRETE PRIOR TO APPLICATION OF DURABLE PAINT.

MAKE TWO SAWCUTS AROUND REMOVAL AREA PRIOR TO REMOVALS. USE EXISTING LONGITUDINAL JOINT LINE AS WEST REMOVAL LIMITS. REMOVAL LIMITS SHALL BE FIELD LOCATED PRIOR TO SAWCUTTING. TRANSVERSE SAW CUTS NO CLOSER THAN 5' FROM AN EXISTING JOINT.

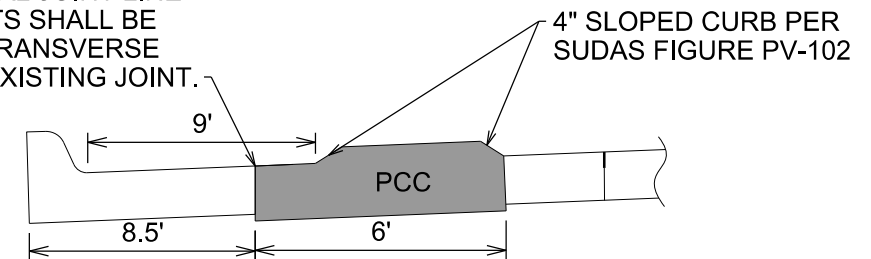

**NOTES:**

- ① CONCRETE PATCH SHALL GENERALLY CONFORM TO SUDAS FIGURE 7040.102.

① MEDIAN DETAIL  
 EX.1 NO SCALE